


Nail Strip Profile NS

Dimensions & Specifications

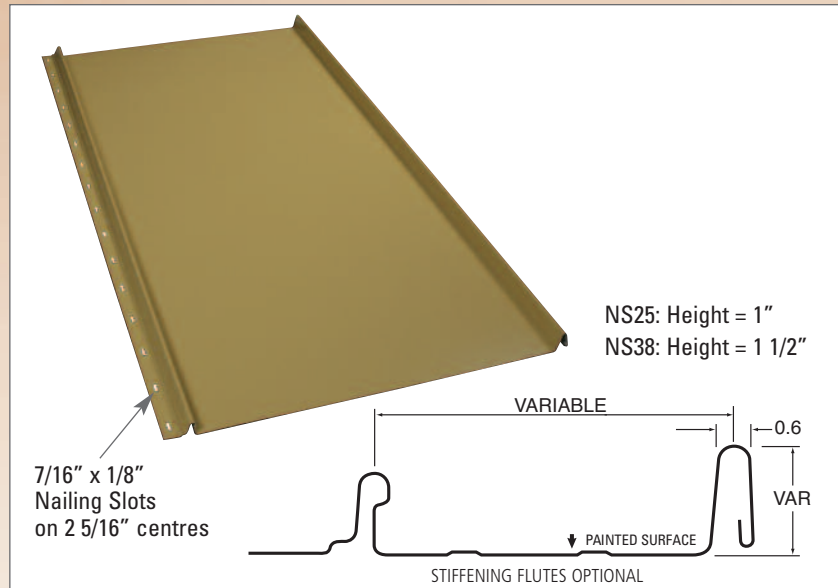

FEATURES:

- No exposed fasteners
- Ease of installation
- Full range of stock colours
- Variable width
- Optional stiffening flutes
- Continuous nail strip
- No seamer required

OIL CANNING:

- **Oil canning is a naturally occurring phenomenon inherent in all sheet steel. Oil canning is not a valid reason for rejection of these products**


INSTALLATION:

- Single skin application
- Recommended that this always be **applied over solid substrate**
- Recommended that this be applied over waterproof membrane
- Fasteners at maximum 2' centres
- Snap-in-place design
- Due to potential difficulty in engaging the side lap, 22 ga. material is not recommended for applications with a slope greater than 4/12

STANDARD PANEL WIDTHS:

	NS25	NS38
24/22 ga. (0.024 - 0.030 in.)	19.56"	18.56"

SIDE LAP DETAIL:

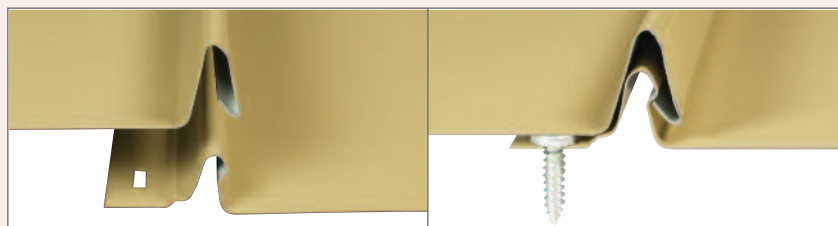

Nail Strip Profile NS




NS38 Charcoal



NS38 Bright Red

Overlap Construction

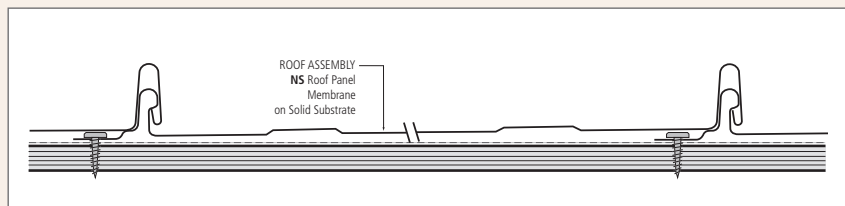

Panel Specifications

	Min./Max. Slope	Min./Max. Material Thickness	Min./Max.* Sheet Length	Min./Max. Panel Width
NS25:	3/12 - 12/12	0.024 - 0.030 in.	2'-6" - 45'	10" - 28"
NS38:	1.5/12 - 12/12	0.024 - 0.030 in.	2'-6" - 45'	10" - 28"

***NOTES:**

Longer sheets are available on request. Additional charges may apply.
Side lap caulking is recommended when the slope is less than 2/12

