


# Snap Lock Profile SL

## Dimensions & Specifications

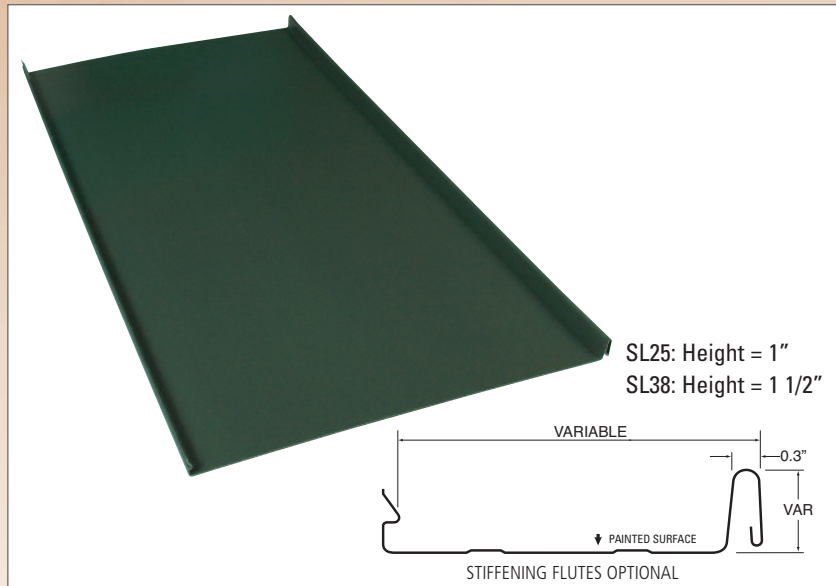

### FEATURES:

- No exposed fasteners
- Ease of installation
- Full range of stock colours
- Variable width
- Optional stiffening flutes
- Hidden clips for easy installation
- No seamer required

### OIL CANNING:

- **Oil canning is a naturally occurring phenomenon inherent in all sheet steel. Oil canning is not a valid reason for rejection of these products**

### INSTALLATION:

- Single skin application
- Recommended that this always be **applied over solid substrate**
- Recommended that this be applied over waterproof membrane
- Clips at maximum 2' centres - 2 fasteners per clip
- Snap-in-place design
- Due to potential difficulty in engaging the side lap, 22 ga. material is not recommended for applications with a slope greater than 4/12

### STANDARD PANEL WIDTHS:

|                              | SL25  | SL38  |
|------------------------------|-------|-------|
| 24 /22 ga. (0.024" - 0.030") | 20.8" | 19.3" |


### HOLD-DOWN CLIP DETAIL:



# Snap Lock Profile SL



## Sheet Overlap Detail w/Hold-down Clip

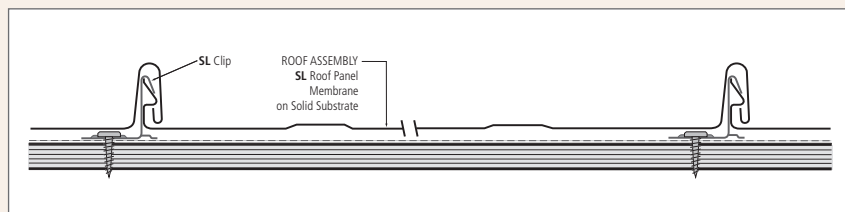

## Panel Specifications

|       | Min./Max. Slope | Min./Max. Material Thickness | Min./Max.* Sheet Length | Min./Max. Panel Width |
|-------|-----------------|------------------------------|-------------------------|-----------------------|
| SL25: | 3/12 - 12/12    | 0.024 - 0.030 in.            | 2'-6" – 45'             | 10" – 28"             |
| SL38: | 1.5/12 - 12/12  | 0.024 - 0.030 in.            | 2'-6" – 45'             | 10" – 28"             |

**\*NOTES:**

Longer sheets are available on request. Additional charges may apply.

