


# Snap Lock Profile SL

## Dimensions & Specifications

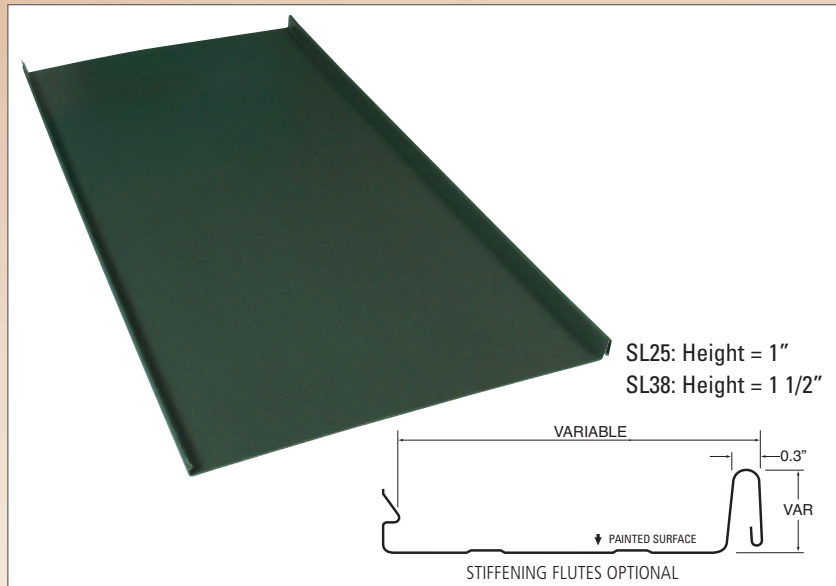

### FEATURES:

- No exposed fasteners
- Ease of installation
- Full range of stock colours
- Variable width
- Optional stiffening flutes
- Hidden clips for easy installation
- No seamer required

### OIL CANNING:

- **Oil canning is a naturally occurring phenomenon inherent in all sheet steel. Oil canning is not a valid reason for rejection of these products**

### INSTALLATION:

- Single skin application
- Recommended that this always be **applied over solid substrate**
- Recommended that this be applied over waterproof membrane
- Clips at maximum 2' centres - 2 fasteners per clip
- Snap-in-place design

### STANDARD PANEL WIDTHS:

	SL25	SL38
24 ga. (0.024")	20.8"	19.3"


### HOLD-DOWN CLIP DETAIL:



# Snap Lock Profile SL



## Sheet Overlap Detail w/Hold-down Clip

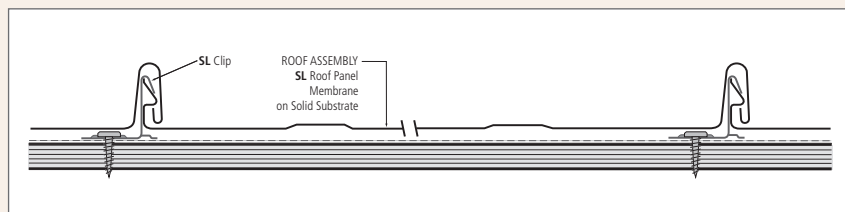

## Panel Specifications

	Min./Max. Slope	Min./Max. Material Thickness	Min./Max.* Sheet Length	Min./Max. Panel Width
SL25:	3/12 - 12/12	0.024 in.	2'-6" – 45'	10" – 28"
SL38:	1.5/12 - 12/12	0.024 in.	2'-6" – 45'	10" – 28"

**\*NOTES:**

Longer sheets are available on request. Additional charges may apply.

