

Fibreglass Embossed Board



FEATURES:

- NOTE:** This is not a stock product - allow 2 weeks for delivery
- Pebbled embossed finish.
 - Will not dent, splinter, rot or rust
 - Government-Accepted for Food Production areas (#7741G28)
 - Easy to clean - pressure wash
 - Easy to install - screw fasten or apply with Nylon Drive Rivets
 - Clean, bright appearance
 - Trims available - see below
 - This product will expand and/or contract under certain conditions

APPLICATIONS:

Interior Wall and Ceiling Liner, Food Processing Plants, Kitchens, Hog Confinement Areas, Coolers, Car Washes, etc.

SHEET SIZES:

48" x 8' and 48" x 10'
Available in 0.090" thickness only

STORAGE:

Acclimate panels for 48 hrs. prior to installation

INSTALLATION:

Pre-drill holes 1/8" larger than screws. Panels must be positioned to leave a minimum gap of 1/4" at floor and ceiling and 1/8" between panels. If moulding is being used, these dimensions must be increased proportionally to allow for expansion and/or contraction.


For Embossed Board, adhesive must be approved for use on Fibreglass.

ACCESSORIES:

- 3/4" Two-piece Drive Rivet, Nylon
- 1-1/2" Two-piece Drive Rivet, Nylon
- #12 x 3/4" Pan Head Screws, White-White
- Siliconized interior white acrylic latex sealant


All Trims in 10' lengths

Trims for
1/8" Sheet

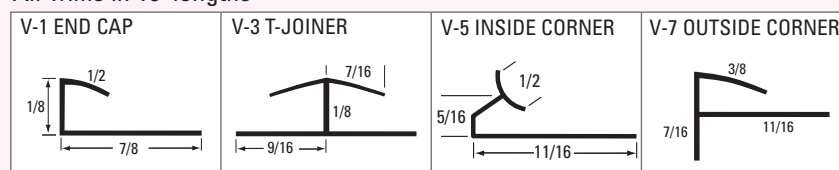

Plastics - Fibreglass

AMP Liner Panels

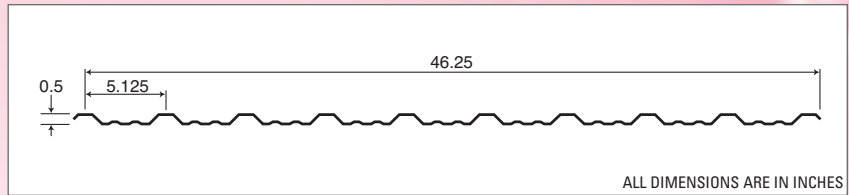

FEATURES:

- Fibreglass Reinforced Plastic Panel
- Government-Accepted for Food Production areas (#KS97111210)
- Flash ignition: 357°C (675°F) per ASTM Method #D1929
- Smooth and easily cleaned surface
- Reversible profile to minimize airflow turbulence
- Corrosion resistant
- Excellent light reflection
- Easy installation - can be screw fastened
- Cuts easily with hand or power saws

APPLICATIONS:

Wall/Ceiling Liner, Agricultural Confinement areas, Industrial/Commercial buildings

SHEET SIZES:

48.25" x 16'-2" Weight: 5 oz. Coverage: 46.5" x 16'

STORAGE:

Acclimate panels for 24 hrs. prior to installation

INSTALLATION:

Pre-drill holes 1/8" larger than screws to allow for seasonal expansion and/or contraction. Fasten on 24" centres. If product is on 24" centres, there are no special requirements for placement of fasteners

ACCESSORIES:

#8 x 3/4" White Stainless Type A Robertson Panhead Screw w/o washer
 #8 x 1-1/2" White Stainless Type A Robertson Panhead Screw w/o washer
 #10 x 1" White Nylon Type AB Screws with or without washers

All Trims in 12' lengths (except I/O Corner - 10')

| I/O CORNER | J-TRIM | H-CHANNEL | BASE TRIM |
|------------|--------|-----------|-----------|
| | | | |

Fibreglass Sheets 6 oz. / 8 oz.

- Type 1 General Purpose (Non-Fire Rated), no surface protection
- 6 oz. and 8 oz. Thickness
- Manufactured to match profiles of steel roofing and siding
- Available in Clear (6000) and Green (6001) - 2 week delivery

- Fire Resistant Panels are also available

