



# Plastics - Polycarbonate

## Polycarbonate Century Rib Panels

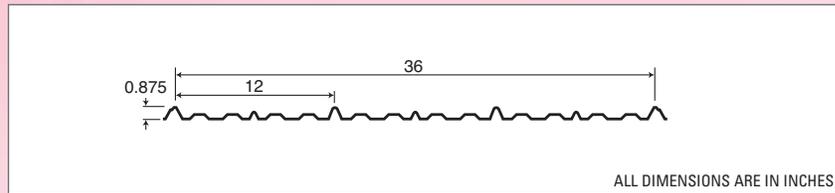

- FEATURES:**
- Clear Polycarbonate UV Resistant Panel
  - 10 Year Limited Warranty on yellowing or loss of light transmission
  - A correct match for Agway's Century Rib roofing profile, providing up to 90% light transmission
  - 20 times the impact resistance of fiberglass of equal thickness
  - Resists breaking or cracking due to hail, wind and accidental impact
- APPLICATIONS:** Agricultural Growing Areas, Seeding Frames, Skylights, Riding Arenas, any requirements for "Glass-like" uses
- SHEET SIZES:** Sheet: 38" x 12' with Coverage of 36". Thickness: 0.8 mm (0.032")
- STORAGE:** Acclimate panels for 24 hours prior to installation. Panels must be stored flat and out of rain or sun.
- INSTALLATION:** Pre-drill holes 1/8" larger than screws. Fasten on 24" centres on wood structure. Maintain a minimum roof pitch of 3/12. Bends to gentle curves.
- ACCESSORIES:** Large Tab Century Foam Closures c/w tape

## Profiled Polycarbonate Panels

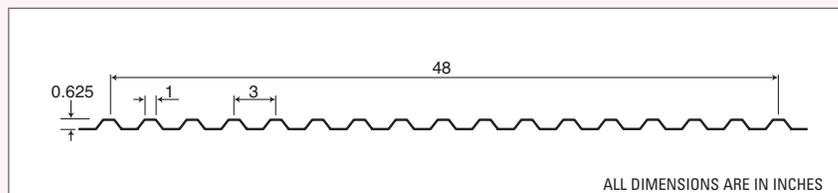


- FEATURES:**
- Polycarbonate UV Resistant Panel, in Clear or Solar Grey
  - 10 Year Limited Warranty on yellowing or loss of light transmission
  - 20 times the impact resistance of fiberglass of equal thickness
  - Resists breaking or cracking due to hail, wind and accidental impact
  - Condensation control allows water to form a thin sheet rather than droplets
- APPLICATIONS:** Agricultural Growing Areas, Seeding Frames, Skylights, Riding Arenas, any requirements for "Glass-like" uses
- SHEET SIZES:** Clear: 50" x 8', 12', 16'. Coverage: 48". Material Thickness: 0.79 mm (0.031")  
Solar Grey: 50" x 12'. Coverage: 48". Material Thickness: 0.79 mm (0.031")
- STORAGE:** Panels must be stored flat and out of rain or sun.
- INSTALLATION:** Pre-drill holes 1/8" larger than screws. Fasten on 24" centres on wood structure. Can be curved; please ask for details. Minimum roof pitch: 3/12
- ACCESSORIES:** 36" Foam Closures (no adhesive)



# Plastics - Polycarbonate

## Polycarbonate Clear Ridge Cover

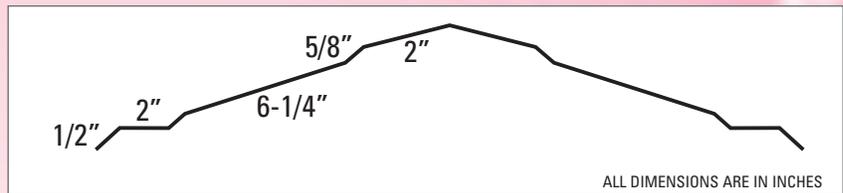

### FEATURES:

- Clear Polycarbonate UV Resistant Ridge Cover
- Cuts out 98% of UV light
- 10 Year Limited Warranty on yellowing or loss of light transmission
- Up to 90% light transmission
- 20 times the impact resistance of fiberglass of equal thickness with a low temperature extreme of -40°C (-40°F)
- Resists breaking or cracking due to hail, wind and accidental impact
- Provides soft, diffused natural light for farm and industrial buildings
- An ideal way to supplement artificial lighting

**APPLICATIONS:** Ridge Closure for use with any configuration of metal roofing when used with the correct closure strip

**SHEET SIZES:** 23 1/4" wide x 10' lengths. Material Thickness: 1.25 mm (0.050")

