

# Fibreglass AG-Doors

## Fibreglass AG-Door Specifications and Options

### FEATURES:

- Quality components that are made to withstand extreme Canadian weather
- All door components are rot-resistant, rust resistant, and easy-to-clean
- The aluminum sill is adjustable by removing the screw caps and tightening the adjustment screws to always create a good seal
- Outside door dimensions for a 3' 0" x 6' 8" door are: 37 1/2" x 81 3/4" which requires an (RSO) Rough Stud Opening of 38 1/2" x 82 1/4"
- Doors are available in standard left and right hand inswing and also left and right hand outswing
- Standard AG-Doors have 4" jambs and ball bearing stainless steel hinges



### COMPONENTS:

- The aluminum sill is thermally-broken
- The weather-stripping is high quality and low-wicking
- The fibreglass door slabs have an insulation value of R13
- The fibreglass door slabs are LVL reinforced plus a metal reinforcement bar
- The fibreglass doors and jambs are factory prefinished and do not require painting
- Jambs are machined to fit a large stainless strike plate, no chiseling required, simply push strike plate into machined area and fasten plate with two supplied screws.
- Jambs are predrilled behind weather-stripping for easy installation

### MANUFACTURERS WARRANTY

- All glass units have a 5 year warranty against seal failure
- All fibreglass door systems have a 10 year limited warranty
- Factory high-quality coloured paint finishes have a 10 year limited warranty
- All Grade 1 hardware has a 5 year warranty, Grade 2 hardware has a 1 year warranty



# Fibreglass AG-Doors


## Fibreglass AG-Doors - Additional Options

- EXTRA OPTIONS**
- Panel embossment available instead of standard "easy-clean" flush panels
  - Jamb width also available in 6 5/8" and 8 1/2"
  - Total height can be shortened to any custom height
  - Slabs and jambs can be prefinished with quality paint in any colour
  - Options include; deadbolt bore, stainless self-closing hinges, low profile non-adjustable sill
  - 2" composite brickmould, heavy-duty self-closing hardware, and panic bars for outswing doors
  - 22" x 36" clear, 22" x 48" clear, 22" x 64" clear, 22" x 36" white grills "9 lite", 22" x 48" white grills "12 lite", 22" x 64" white grills "15 lite" and 22" x 36" vented lite
  - Quality Grade 1 Stainless knobs and Grade 2 Stainless knobs, levers also available
  - Available door panel sizes are 28", 30", 32", 34", 36" and 42"

### Installation Configurations



### Style Options

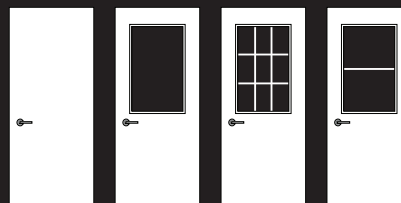

### Handle Options

