


Snap Lock Profile SL

Dimensions & Specifications

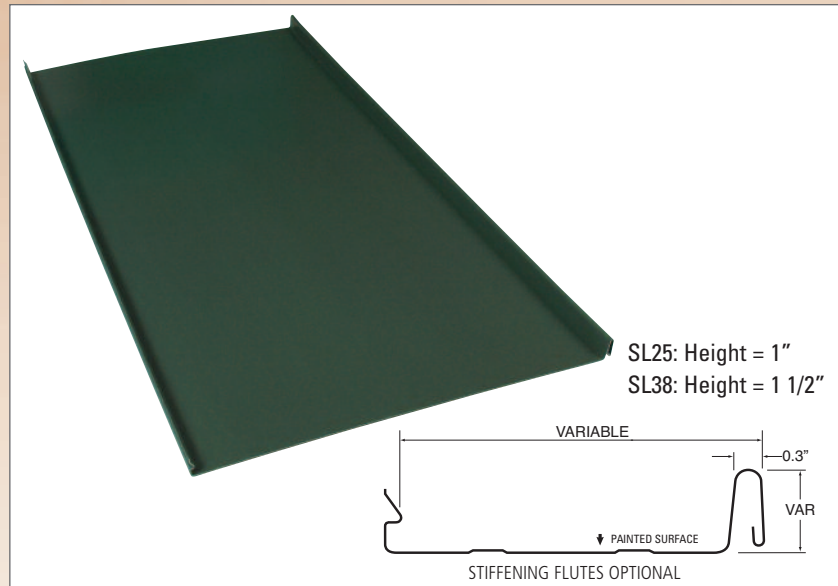

FEATURES:

- No exposed fasteners
- Ease of installation
- Full range of stock colours
- Variable width
- Optional stiffening flutes
- Hidden clips for easy installation
- No seamer required

OIL CANNING:

- **Oil canning is a naturally occurring phenomenon inherent in all sheet steel. Oil canning is not a valid reason for rejection of these products**

INSTALLATION:

- Single skin application
- Recommended that this always be **applied over solid substrate**
- Recommended that this be applied over waterproof membrane
- Clips at maximum 2' centres - 2 fasteners per clip
- Snap-in-place design

STANDARD PANEL WIDTHS:

| | SL25 | SL38 |
|-----------------|-------|-------|
| 24 ga. (0.024") | 20.8" | 19.3" |


HOLD-DOWN CLIP DETAIL:



Snap Lock Profile SL



Sheet Overlap Detail w/Hold-down Clip

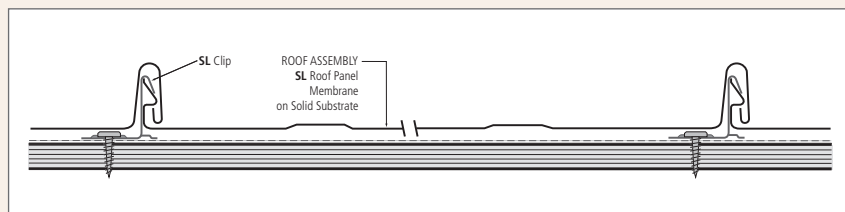

Panel Specifications

| | Min./Max. Slope | Min./Max. Material Thickness | Min./Max.* Sheet Length | Min./Max. Panel Width |
|-------|-----------------|------------------------------|-------------------------|-----------------------|
| SL25: | 3/12 - 12/12 | 0.024 in. | 2'-6" – 45' | 10" – 20.8" |
| SL38: | 1.5/12 - 12/12 | 0.024 in. | 2'-6" – 45' | 10" – 19.3" |

*NOTES:

Longer sheets are available on request. Additional charges may apply.

