


Nail Strip Profile NS

Dimensions & Specifications

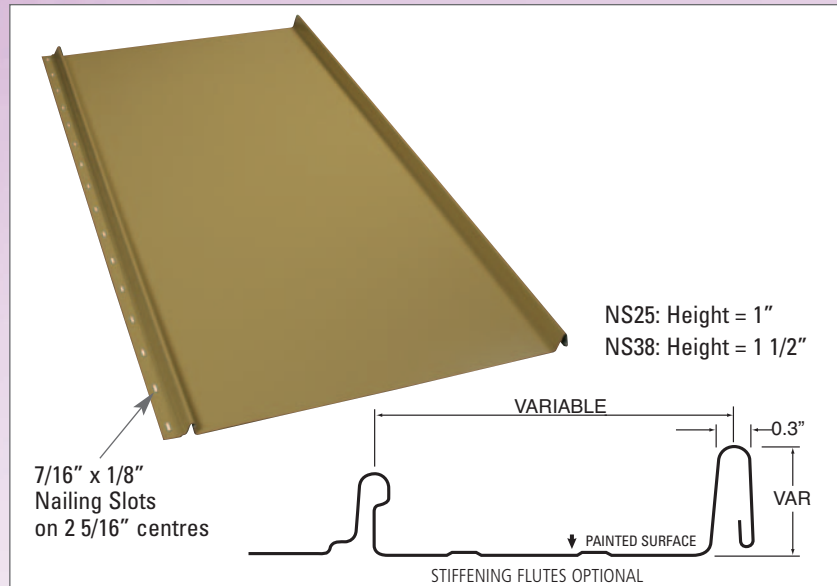

FEATURES:

- No exposed fasteners
- Ease of installation
- Full range of stock colours
- Variable width
- Optional stiffening flutes
- Continuous nail strip
- No seamer required

OIL CANNING:

- **Oil canning is a naturally occurring phenomenon inherent in all sheet steel. Oil canning is not a valid reason for rejection of these products**


INSTALLATION:

- Single skin application
- Recommended that this always be **applied over solid substrate**
- Recommended that this be applied over waterproof membrane
- Fasteners at maximum 2' centres
- Snap-in-place design

STANDARD PANEL WIDTHS:

| | NS25 | NS38 |
|--------------------|-------|-------|
| 24 ga. (0.024 in.) | 19.5" | 18.5" |

SIDE LAP DETAIL:

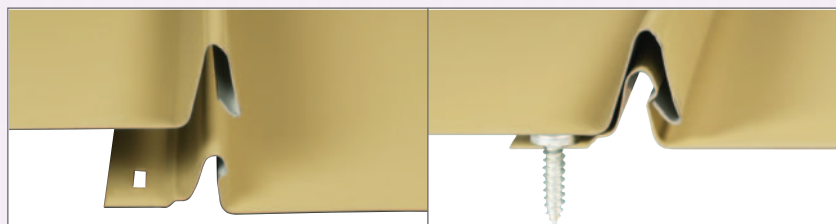

Nail Strip Profile NS




NS38 Charcoal



NS38 Bright Red

Overlap Construction

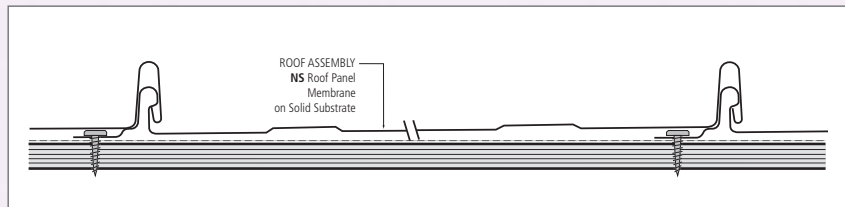

Panel Specifications

| | Min./Max. Slope | Min./Max. Material Thickness | Min./Max.* Sheet Length | Min./Max. Panel Width |
|-------|-----------------|------------------------------|-------------------------|-----------------------|
| NS25: | 3/12 - 12/12 | 0.024 in. | 2'-6" – 45' | 10" – 19.5" |
| NS38: | 1.5/12 - 12/12 | 0.024 in. | 2'-6" – 45' | 10" – 18.5" |

***NOTES:**

Longer sheets are available on request. Additional charges may apply.

